

FÖGE

Industrial Equipments



www.fogegmbh.com




info@fogegmbh.com



FÖGE ELEKTRONIK GMBH
Böhleswasenweg 11
72555 Metzingen



+49 7123 9570508



CE

Instruction Manual

Product: VL-BLA Series Large
Area Backlight

1. Intended Use

VL-BLA Series Large Area Backlight is designed for use in industrial areas. Purpose of the product is inspection of parts, positioning for large parts. Part is positioned between light and camera.



The system must be operated within the limits specified in technical data and used according to technical specifications as well as installation instructions. The system must be used in such a way that no person are in danger or machines and other material goods are damaged in the event of malfunction or total failure of the system. Take additional precautions for safety and damage prevention in case of safety related applications.

2. Technical Information

Model	Colour	Wavelength/ Color Temperature	Power Supply	Power Consumption	Connection	A[mm]	B[mm]	C[mm]	D[mm]	E[mm]
VL-BLA-300-300-W-24-C30	W	6500K	24VDC	24W	M8 4 pin w 300mm cable	300	300	352	385	26
VL-BLA-400-400-W-24-C30	W	6500K	24VDC	34W	M8 4 pin w 300mm cable	400	400	452	485	26
VL-BLA-500-500-W-24-C30	W	6500K	24VDC	43W	M8 4 pin w 300mm cable	500	500	552	585	26
VL-BLA-600-600-W-24-C30	W	6500K	24VDC	50W	M8 4 pin w 300mm cable	600	600	652	685	26
VL-BLA-700-700-W-24-C30	W	6500K	24VDC	70W	M8 4 pin w 300mm cable	700	700	752	785	26
VL-BLA-800-800-W-24-C30	W	6500K	24VDC	80W	M8 4 pin w 300mm cable	800	800	852	885	26
VL-BLA-900-900-W-24-C30	W	6500K	24VDC	90W	M8 4 pin w 300mm cable	900	900	952	985	26
VL-BLA-1000-1000-W-24-C30	W	6500K	24VDC	100W	M8 4 pin w 300mm cable	1000	1000	1052	1085	26

3. Dimensions / Installation


System operation assumes knowledge of the assembly instructions. The symbols used for safety is shown in section 8(Safety) of manual.

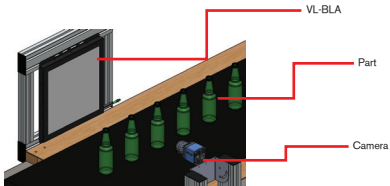

Sample Applications




Positioning on windscreen for sensor mounting, position check



Web inspection, part inspection, part direction, contamination check on web







Wide area part inspection pharmaceuticals, food, beverage



Web density check, contamination inspection



4. Electrical Connection

	Cable	Ordering Code	Drawing/Connection
1	M8 female 0° with cable PVC 4x0.25 bk UL/CSA 3m	7000-08061-6110300	 
2	M8 female 0° with cable PVC 4x0.25 bk UL/CSA 5m	7000-08061-6110500	
3	M8 female 90° with cable PVC 4x0.25 bk UL/CSA 3m	7000-08101-6110300	 
4	M8 female 90° with cable PVC 4x0.25 bk UL/CSA 5m	7000-08101-6110500	

5. Display/Controls

Product does not have this specification.

6. Faults

In any case do not open the product.  

If the leds not on check the connection and power supply.



If still leds are not on contact FÖGE or distributor.

7. Warnings

- Connect the power supply and the display/output device according to the safety regulations for electrical equipment.
- The supply voltage must not exceed the specified limits.
- Avoid shocks and impacts to the sensor.
- Protect the cable against damage.

Possible Results of Avoidance

Risk of injury by electric shock 

Damage to or destruction of the sensor  

8. Safety

System operation assumes knowledge of the assembly instructions. The following symbols are used in these assembly instructions:



Indicates a hazardous situation which, if not avoided, may result in minor or moderate injury.



Indicates a situation that may result in property damage if not avoided.



Indicates an electrical shock if not avoided or properly follow comments.

9. Liability for Material Defects

All components of the device have been checked and tested for functionality at the production facility. However, if defects occur despite our careful quality control, FÖGE or your dealer must be notified immediately.

The liability for material defects is 12 months from delivery.

Within this period, defective parts, except for wearing parts, will be repaired or replaced free of charge, if the device is returned to FÖGE with shipping costs prepaid. Any damage that is caused by improper handling, the use of force or by repairs or modifications by third parties is not covered by the liability for material defects. Repairs are carried out exclusively by FÖGE.

Further claims can not be made. Claims arising from the purchase contract remain unaffected. In particular, FÖGE shall not be liable for any consequential, special, indirect or incidental damage. In the interest of further development, FÖGE reserves the right to make design changes without notification.

10. Decommissioning, Disposal

Remove the power supply and output cable on the sensor.

Incorrect disposal may cause harm to the environment.

Dispose of the device, its components and accessories, as well as the packaging materials in compliance with the applicable country-specific waste treatment and disposal regulations of the region of use.